









US15C-R Proximity card reader

US15C-B Barcode card reader

US15C-MAG Magnetic card reader

US15C-ID Fingerprint reader

US15 C Time & Attendance Terminal


Choice of Proximity Barcode, Magnetic Stripe, or Fingerprint Reader in a compact design

Standard Function

- Wi-Fi as a standard feature on all devices
- User friendly UI and menu system design
- Hardware level clock authentication
- Support for local and external data/system backup
- User level duplicate punch prevention
- Tip entry support
- Multiple level job code support
- Customizable user access control privileges
- Enhanced network security
- Web server support as a standard function

- Automatic status key switch
- Self-Service API
- 9 Digits User ID
- · Daylight savings time
- Customizable bell schedules
- Private or public SMS messaging support
- USB-host
- User Attendance search
- PUSH and Standalone SDK compatibility with TFT 2.0
- Enhanced encryption system for data integrity and security

Installation

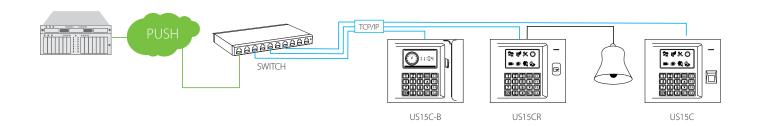

Specifications

Capacity

ID Cards: 10,000

Transactions: 100,000

Fingerprint templates: 3,000

Fingerprint Sensor

ZK2750P

Display

3.0 in. TFT Color Screen

Communications

RS232, Ethernet, USB-Host, Wi-Fi

Power

12 V DC, 1.5 A

Optional: 12V POE injector (sold separately) Optional: 12V Battery Backup (sold separately)

Environment

Operating Temperature: 32° F to 113° F (0° C to 45° C)

Operating Humidity: 5% to 80%

Supported Devices

US15C-ID Fingerprint and standard RFID prox reader

US15C-HID Fingerprint and HID prox reader

US15C-MAG Magnetic card reader

US15C-B Barcode card reader

US15CR Standard RFID prox reader

US15CR -HID Standard HID prox reader

Dimensions

Width: 6.5 in. (16.5 cm) Height: 5.5 in. (14 cm) Depth: 1.8 in. (4.6 cm) Weight: 0.95 lbs. (0.43 kg)

What's in the Box







Mounting Plate



AC Power Adapter



External Relay Connectors



Serial Cable



Network Cable



Screws, anchors & Screwdriver



ID card









Design and Specifications subject to change without notice

ZKTeco

201 Circle Drive North, Suite 116, Piscataway, NJ 08854, USA

(1)+1 732-412-6007 (1)+1 732-412-6008

sales@zktechnology.com | zktechnology.com

